

RIVET STYLE RACKING ASSEMBLY INSTRUCTIONS

Tools and protective equipment

A Large rubber mallet

Protective gloves and Safety shoes


1)

Assemble the end frames first by taking two uprights and tapping in the side beams (with the flange at the top) at the required levels.

Now install each shelf completely starting from the bottom as follows :

2)

Locate the face beams at the same levels as the side beams (The top of the beam has each corner cut away).

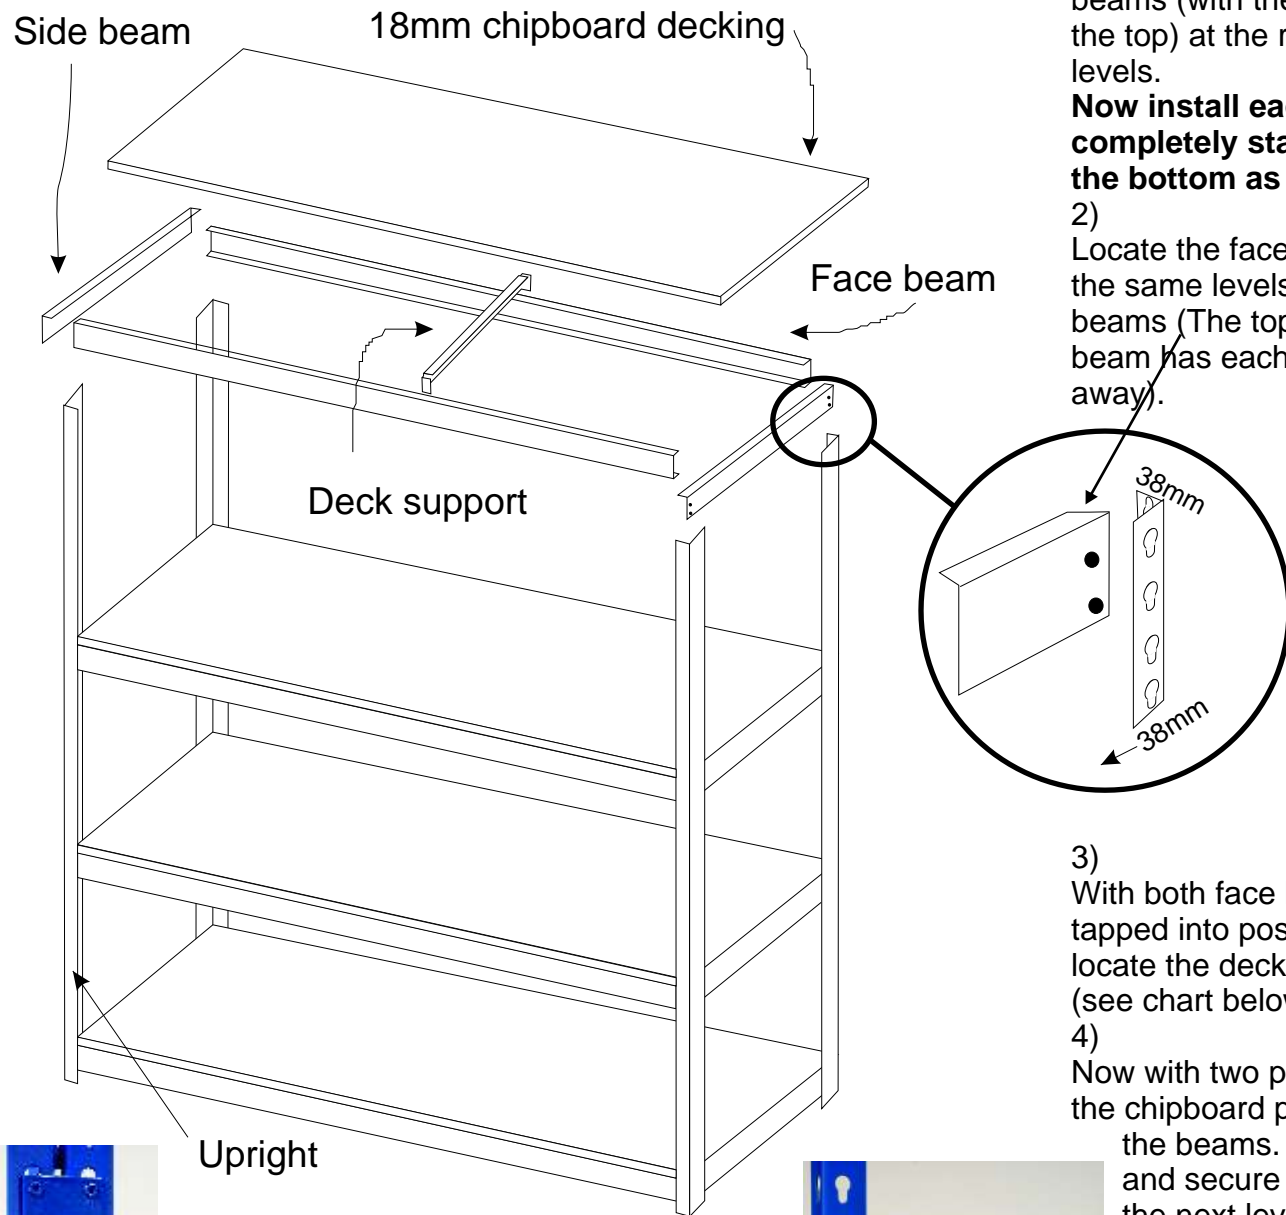

3)

With both face beams firmly tapped into position, now locate the deck supports (see chart below)


4)

Now with two people, lay the chipboard panels onto the beams. When safe and secure move up to the next level and finish completely.



Upright

Tie plate (creates 10mm gap between bays)



Bay sizes

924mm 1228mm - 1532mm - 1838mm - 2448mm

1229mm
924mm
620mm
466mm
314mm

Beam	No of deck supports	Deck Supports	Capacity
2440mm	2		400kgs
2135mm	1		475kgs
1830mm	1		550kgs
1525mm	1		500kgs
1220mm	1		575kgs